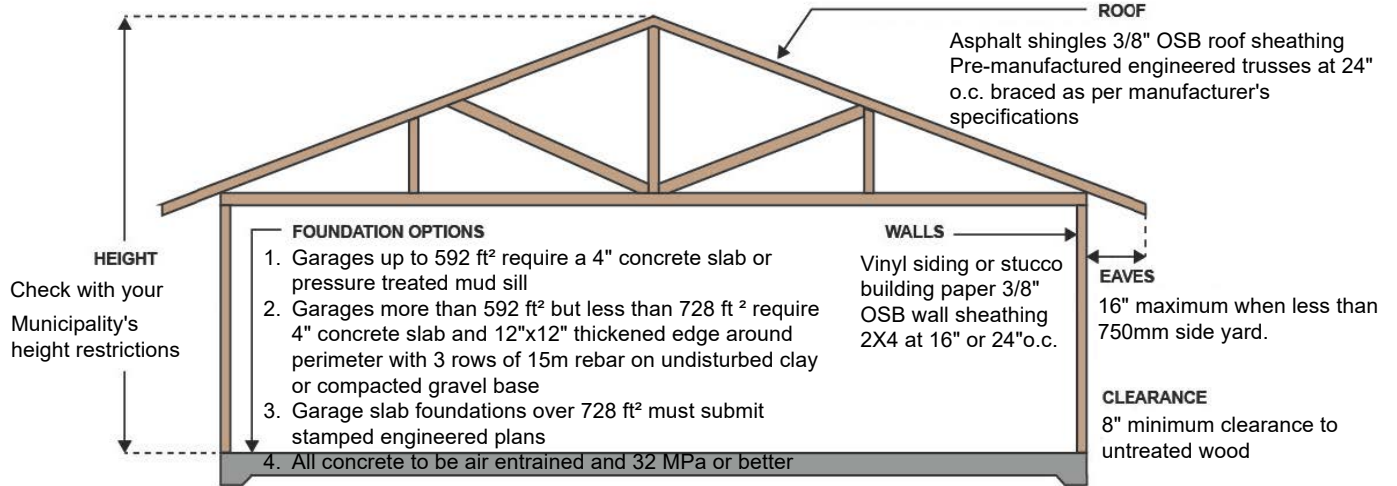




# Accessory Building Specifications- Part 1

Development Permit # \_\_\_\_\_

Civic Address: \_\_\_\_\_



## Roofing Material

- Asphalt Shingles
- Cedar, Pine Shakes/Shingles
- Metal Roofing
- Other (specify) \_\_\_\_\_

## Roofing Sheathing

- Min. 3/8" OSB or plywood  
NOTE: OSB or plywood less than 1/2" requires H clips and bridge blocking
- 1/2" OSB or plywood
- Other (specify) \_\_\_\_\_

## Roof Framing

- Pre-manufactured Engineered Truss
- Stick Build Rafters (provide details)

## Exterior Finish

- Vinyl Siding
- Stucco
- Metal Siding
- Other (specify) \_\_\_\_\_

## Foundation

- 4" Slab with Thickened Edges
- Strip footing & 4' frost wall

## Interior Development

NOTE: A separate permit is required for each of these items (if applicable)

- Electrical
- Gas
- Plumbing
- Other (specify): \_\_\_\_\_

## Wall Sheathing

- 3/8" OSB
- 3/8" plywood
- 1/2" plywood
- 1/2" OSB
- Other (specify): \_\_\_\_\_

## Wall Framing

- 2 x 4 @ 16" o.c.
- 2 x 4 @ 24" o.c.
- 2 x 6 @ 16/24" o.c.
- Insulated walls and ceilings

## Garage Door Beam

Length: \_\_\_\_\_

Depth: \_\_\_\_\_ # of Plys: \_\_\_\_\_

- Built Up
- Engineered

**Garage Door Size:** \_\_\_\_\_

## Please Note:

Windows cannot be placed in a wall that is closer than 4 feet to a neighbour's property.

If the roof framing members transfer roof loading to the overhead garage door beam, please specify the size of the garage door beam.

Garage door beams without roof loading must be minimum size 2 - 2 x 12 c/w a minimum of 3" bearing

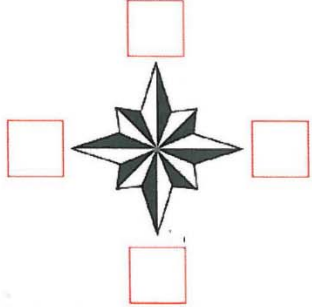
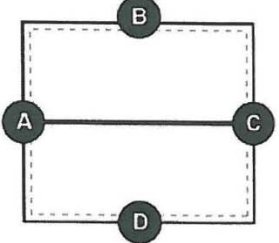

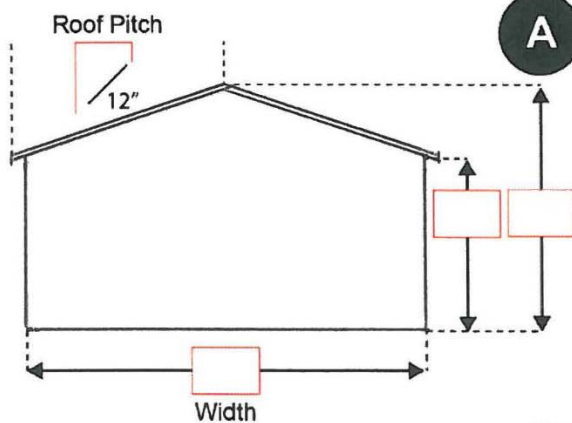
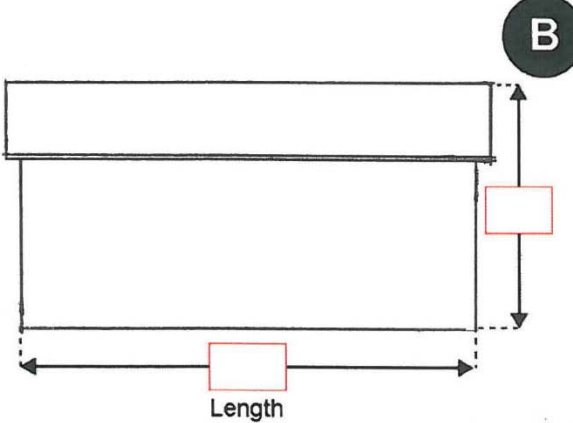
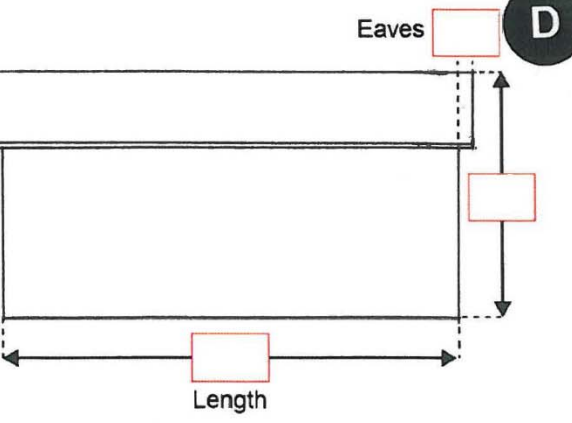
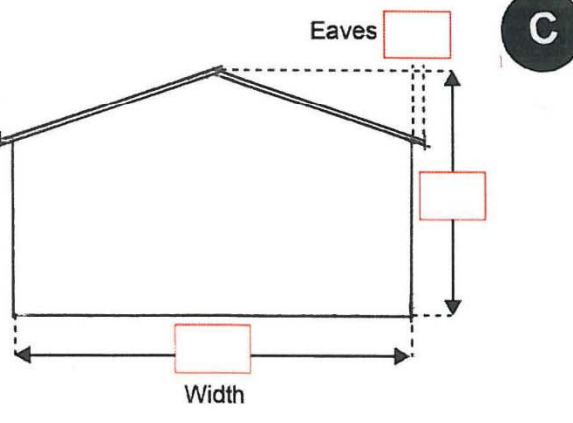




Maximum size of detached garage on a slab thickening foundation is 110 sq. m. with truss span not exceeding 85m. Oversized garage will require review and approval by a Safety Codes Officer.

Walls to be secured to slab with 2.5mm anchor bolts at 2.4m on center maximum.

Cannot build over an underground gas line.

## Direction of Trusses

- Trusses parallel to overhead door opening
- Trusses perpendicular to overhead door opening
- Other Foundation (details, engineering)

<h3 style="margin: 0;">Key Map</h3> <p><input type="checkbox"/> Please indicate North on the north arrow relative to the <i>site plan view</i></p>	<div style="text-align: center;">  </div> <div style="text-align: right; margin-top: 20px;"> <p><i>Site Plan View</i></p>  </div>
<p><b>Elevation View:</b> Please show all doors and windows with their width and length dimensions</p>	
<div style="margin-bottom: 20px;"> <p>Roof Pitch</p>  <p>12"</p> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p style="text-align: center;">Width</p> </div> <div style="width: 45%;">  <p style="text-align: center;">Length</p> </div> </div> <div style="display: flex; justify-content: space-between;"> <div style="width: 45%;">  <p style="text-align: center;">Length</p> </div> <div style="width: 45%;">  <p style="text-align: center;">Width</p> </div> </div>	<div style="text-align: center; margin-bottom: 20px;"> <p><b>A</b></p>  </div> <div style="text-align: center; margin-bottom: 20px;"> <p><b>B</b></p>  </div> <div style="text-align: center; margin-bottom: 20px;"> <p><b>D</b></p>  </div> <div style="text-align: center;"> <p><b>C</b></p>  </div>